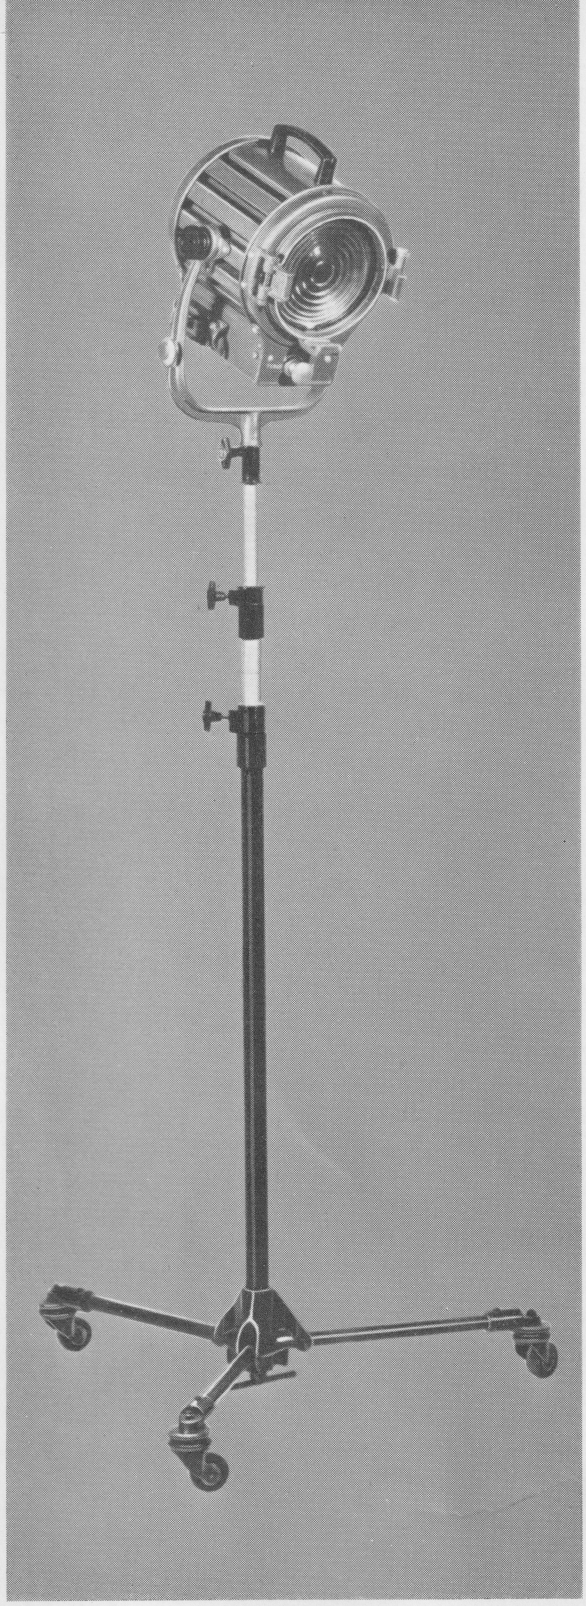

'PUP' M-R Type 500/501 : 500TV/501TV

'PUP' M-R Type 500/501 : 500TV/501TV
The most versatile baby spotlamp in use today. Used as a modelling or key light, or for balancing with M-R floodlamps.

SPECIFICATION

LAMPHEAD M-R Type 500/501

CONSTRUCTION	Interlocking steel channel pieces with steel end spinnings and cast, light alloy fittings.

M-R Type 500TV/501TV

CONSTRUCTION	Interlocking light alloy channel pieces with alloy end spinnings and cast, light alloy fittings.
YOKE	Cast, lightweight, alloy with $\frac{5}{8}$ inch diameter spud.
LENS	6 inch diameter 'Fresnel' type.
BEAM ANGLE	Variable from 12° to 58°.
MIRROR	$5\frac{1}{4}$ inch diameter 'Alzak'.
FOCUSING	Control knob front and rear.
SWITCH	Quick make and break toggle type fitted on lamphead.
CABLE	25 feet of 3-core rubber covered, attached to lamp.
BULB TYPE AND RATING	(Not included in price of lamphead). Pre-focus: 100–250 volt, 500 watt, Lamp Ref. A1/8. Medium Bi-post: 115–250 volt, 500 watt, Lamp Ref. S/3; 115 or 250 volt, 750 watt, Lamp Ref. S/6; 115 or 230 volt, 500/750 watt, Lamp Ref. C.T.

M-R Type No.	Lamphead	Socket	Weight with cable
500	Steel	Medium Bi-post	17 lb. 8 oz.
500TV	Alloy	Medium Bi-post	11 lb.
501	Steel	Pre-focus	17 lb. 8 oz.
501TV	Alloy	Pre-focus	11 lb.

STAND M-R Type S.500

(Not included in price of lamphead).

Double lift, folding type.
Weight of Stand $18\frac{1}{2}$ lb. 8·4 kg.

CONSTRUCTION	Steel tubing, non-ferrous metal fittings with 2 inch rubber tyred castors.
SOCKET DIAMETER	$\frac{5}{8}$ inch.

MOLE-RICHARDSON